

PRESSURE WASHER EQUIPMENT

Part # CDSG1000-HPH60:
Pressure washer kit - 24 lbs (10.9 kg)

Part # CDSG1000:
High pressure spray gun, wand and
HI/LO spray nozzle - 3 lbs (1.36 kg)



* Niedner's Delta Hydro bleed caps are less expensive, safer and prevent unnecessary stress on fire hose nozzles. They also protect your tester adapters and/or check valves during storage.

Part # CDHPH60:
High pressure 60 ft (18,3 m) hose
(3000 PSI (20686 kPa) tested)

Liquid injector. For use with a 60 ft (18,3 m) hose only.
Offered for those tough cleaning jobs.

Part # DEL-1054 (for 1500 series):
Part # DEL-1090 (for 2000 & 3500 series):

When ordering a new hose tester, the following accessories will be required to conduct hose testing:

- Adapters for all hose sizes
- Bleed Caps
- Safety Tie Lines
- Gated Wye Connectors (optional)

Can be used with smaller sizes to double the total footage allowed to test per NFPA guidelines.

Products received may differ from actual illustrations.



1-800-567-2703
sales@niedner.com

www.niedner.com

DEPENDABLE PRODUCTS - QUALITY SERVICE - INNOVATIVE SOLUTIONS



DELTA HYDRO HOSE TESTERS

Hose is the primary product manufactured by Niedner; however, for our customers' added safety and convenience we also manufacture the following hose testers. Each model is unique and offers a better and safer way to test hose.

Extend fire engine service and life with a Delta Hydro Hose Tester; available exclusively through your Niedner dealer.



THE DELTA HYDRO CDHT1500 INCLUDES:

- All STAINLESS 1 1/2" (38 mm) manifold
- All STAINLESS heavy duty low profile (4 wheels) steel cart
- Powerful 1.7 HP INDUSTRIAL motor
- Electrical connection: 110 / 120v
- FULLY AUTOMATIC 1 1/2" (38 mm), aluminum check valve system on all 4 outlets (reduces labor – increases SAFETY)
- NST thread standard - NPSH thread available upon request
- Check valve assemblies available in brass
- Large 3.2 GPM (12.6 L) OIL BATH pump, complete with thermal protective valve
- Delivers up to 500 PSI (3447 kPa) pressure
- 1 1/2" (38 mm) NST female swivel inlet connector
- In-line filter included on all models
- Complies with NPFA standards
- One year limited warranty




Product received may differ from actual illustrations

**Model CDHT1500SS 92 lbs (41,7 kg)
6 lbs (2.8kg) for 4 brass check valves
(weight for unit includes shipping crate)**

THE DELTA HYDRO CDHT2000SS INCLUDES:

- All STAINLESS 2" (51 mm) manifold
- All STAINLESS heavy duty steel cart with 2 back wheels
- Low profile cart (4 wheels) also available
- Powerful 1.7 HP INDUSTRIAL motor
- Electrical connection 110/120 v.
- FULLY AUTOMATIC 2 1/2" (64 mm), aluminum check valve system on all 6 outlets (reduces labor – increases SAFETY)- comes standard with NST threads
- Check valve assemblies available in brass
- Large 4.3 GPM (16.3 L) OIL BATH pump, complete with thermal protective valve
- Delivers up to 500 PSI (3447 kPa) pressure
- 2 1/2" (64 mm) NST female swivel inlet connector
- In-line filter included on all models
- Complies with NPFA standards
- One year limited warranty
- Doubles as pressure washer (pressure washing equipment sold separately)

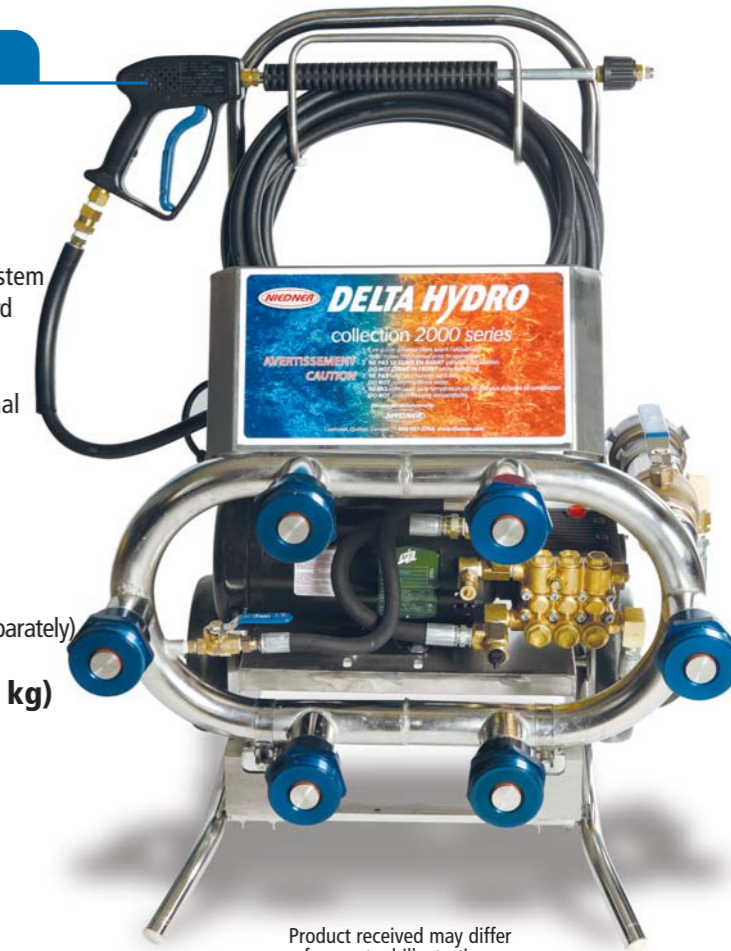


Product received may differ from actual illustrations

**Electric Model CDHT2000SS 111 lbs (50,4 kg)
Add 21 lbs (9.5kg) for 6 brass check valves
(weight for unit includes shipping crate)**

THE DELTA HYDRO CDHT2000GA-SS-LP INCLUDES:

- All STAINLESS 2" (51 mm) manifold
- All STAINLESS heavy duty low profile (4 wheels) steel cart
- Stand up cart (2- back wheels) also available (135 lbs-61.2 kg)
- Powerful 5.5 HP Honda engine
- FULLY AUTOMATIC 2 1/2" (64 mm), aluminum check valve system on all 6 outlets (reduces labor – increases SAFETY) – comes standard with NST threads
- Check valve assemblies available in brass
- Large 5.6 GPM (21.2 L) OIL BATH pump, complete with thermal protective valve
- Delivers up to 500 PSI (3500 kPa) pressure
- 2 1/2" (64 mm) NST female swivel inlet connector
- In-line filter included on all models
- Complies with NPFA standards
- One year limited warranty
- Doubles as pressure washer (pressure washing equipment sold separately)

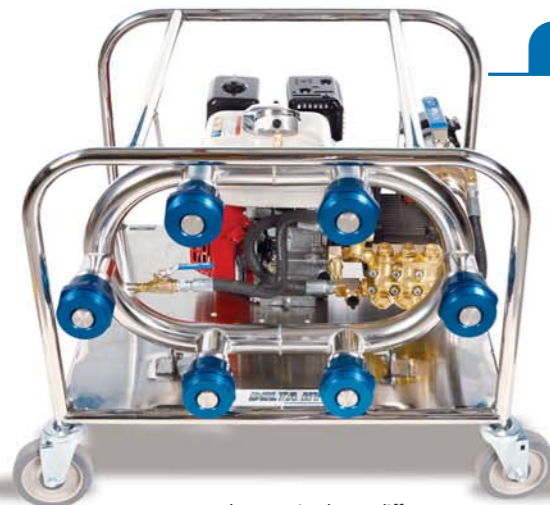

Product received may differ from actual illustrations

**Model CDHT2000GA-SS-LP 140 lbs (63,5 kg)
21 lbs (9.5kg) for 6 brass check valves
(weight for unit includes shipping crate)**

THE DELTA HYDRO CDHT2000-SS-LP INCLUDES:

- All STAINLESS 2" (51 mm) manifold
- All STAINLESS heavy duty low profile (4 wheels) steel cart
- Powerful 1.7 HP INDUSTRIAL motor
- Electrical connection: 110 / 120v
- FULLY AUTOMATIC 2 1/2" (64 mm), aluminum check valve system on all 4 outlets (reduces labor – increases SAFETY)– comes standard with NST threads
- Check valve assemblies available in brass
- Large 4.3 GPM (16.3 L) OIL BATH pump, complete with thermal protective valve
- Delivers up to 500 PSI (3447 kPa) pressure
- 2 1/2" (64 mm) NST female swivel inlet connector
- In-line filter included on all models
- Complies with NPFA standards
- One year limited warranty
- Doubles as pressure washer (pressure washing equipment sold separately)



Product received may differ from actual illustrations

**Model CDHT2000-SS-LP 116 lbs (52,6 kg)
21 lbs (9.5kg) for 6 brass check valves
(weight for unit includes shipping crate)**

THE DELTA HYDRO CDHT3500SS INCLUDES:

- All STAINLESS 2" (51 mm) manifold
- All STAINLESS heavy duty steel cart with 2 back wheels
- Powerful 4.0 HP Industrial motor
- FULLY AUTOMATIC 2 1/2" (64 mm), aluminum check valve system on all 6 outlets (reduces labor – increases SAFETY) – comes standard with NST threads
- Check valve assemblies available in brass
- Large 5.6 GPM (21.28 L) OIL BATH pump, complete with thermal protective valve
- Delivers up to 500 PSI (3447 kPa) pressure
- Electrical connection – 220/240 v
- 2 1/2" (64 mm) NST female swivel inlet connector
- In-line filter included on all models
- Complies with NPFA standards
- One year limited warranty
- Doubles as pressure washer (pressure washing equipment sold separately)



Product received may differ from actual illustrations

**Model CDHT3500SS 145 lbs (65,7 kg)
Add 21 lbs (9.5kg) for 6 brass check valves
(weight for unit includes shipping crate)**